
REVISIONS					
REV	DESCRIPTION	BY	ECO	DATE	
Α	FOR RELEASE	M. DESJARDINS	0219110	5/13/2005	
В	UPDATED TITLE BLOCK AND BORDER	NISHANT S.	0226085	9/23/2022	

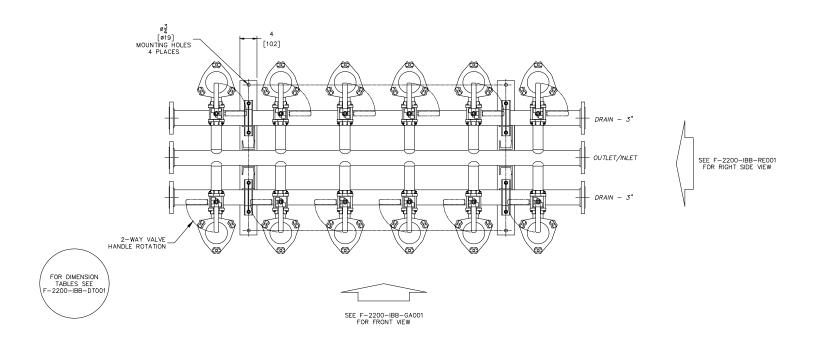

- NOTES:

 1. ALL FLANGED PROCESS CONNECTIONS ARE LAP JOINT TYPE, ZINC PLATED CARBON STEEL.

 2. PROCESS FLANGE CONNECTIONS ARE DRILLED TO ANSI, CLASS 150 OR DIN ND16.

 3. HEADERS MAY BE PIPED AT EITHER END; BLIND FLANGES (PURCHASER SUPPLIED) REQUIRED FOR OPPOSITE END.

 4. ALL METALLIC WETTED PARTS ARE 316 STAINLESS STEEL.

 5. ALL DIMENSIONS ARE IN INCHES WITH METRIC EQUIVALENTS IN BRACKETS [1].

 6. FILTER ELEMENTS ARE DESIGNED TO WITHSTAND 150 PSI [10.3] AUR DISTRIBUTION POPSIS

- [10.3 BAR] DIFFERENTIAL PRESSURE.

 7. DESIGN PRESSURE IS 250 PSI (17.24 BAR).
 HYDROSTATIC TEST PRESSURE IS 325 PSI (22.4 BAR).
- 8. EXTERIOR FINISH: TOP COAT: 1 MIL MINIMUM. COLOR: SILVER.

DRAWN BY M. DESJARDINS	
SCALE AS DRAWN	ETIM

EATON FILTRATION, LLC DESIGN CENTER

RESTRICTION RESTRICTED

SHEET 1 OF 1 TITLE

DATE

F-2200 INTERNAL BACKWASH FILTER BACK TO BACK FLOOR PLAN

PROJECTION THIRD ANGLE



05/13/05

SIZE DWG FILENAME Α

F-2200-IBB-FP001

REV

В

EATON CORPORATION — CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DRAWNO AND/OR TECHNICAL INFORMATION
THIS DOCUMENT, INCLUDING THE DRAWNG AND INFORMATION CONTINUED THEREON IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON AT ANY TIME. BY TAKING THE
POSSESSION OF THIS DOCUMENT THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BEED IN ANY MANNER AUXFRST OT THE INTEREST OF EATON AND
THAT NO PORTION OF THIS DRAWING MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WROTTEN CONSENT OF EATON, IN THE CASE OF CONFLICTING CONTRACTUAL
PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.
2022 EATON CORPORATION — ALL RIGHTS RESERVED.